

EDINBURGH
ANALYTICAL



FE30 FLUORESCENCE SPECTROMETER

www.edinburghanalytical.com



INTRODUCING FE30

HIGH SENSITIVITY FLUORESCENCE SPECTROMETER



The FE30 Fluorescence Spectrometer enables high sensitivity fluorescence measurements for advanced research and analysis.

Unlock more from your fluorescence measurements with the FE30 – a powerful benchtop spectrometer built for demanding applications. With an extended wavelength range, ultra-fast scanning, and optimised electronics, it delivers high-quality data out to 900 nm.


Spectracle® software makes advanced measurements feel effortless. Its intuitive Workspace Manager streamlines measurement workflows, helping you get the most from your instrument. Whether in research or industry, the FE30 brings reliable, high-performance fluorescence analysis to your lab.



KEY FEATURES

- > Extended wavelength range of measurement up to 900 nm
- > Fast scanning – out to 60,000 nm/min
- > Excellent sensitivity
- > 3D scanning and analysis functions
- > Selection of accessories
- > Modern and easy-to-use Spectracle® software for instrument control, measurement and analysis

FE30 APPLICATIONS



Semiconductors



Food



Molecular Biology



Chemistry



Life Sciences



Environmental




Material Science

MOLECULAR SPECTROSCOPY | UV-Vis | FTIR | Fluorescence



OPTICAL PLATFORM

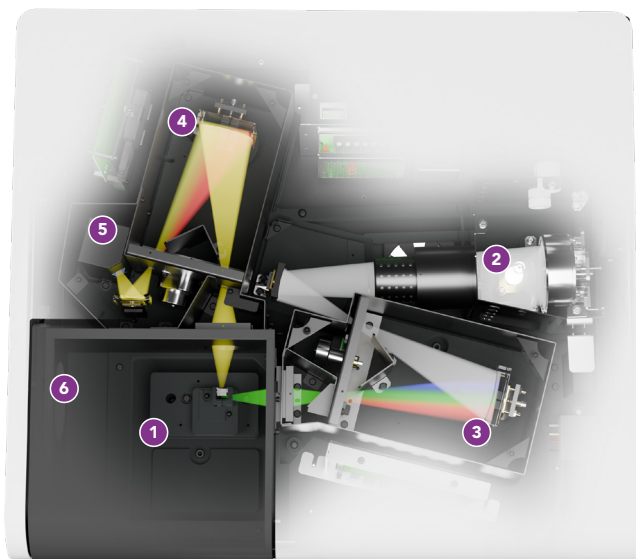

KEY FEATURES

- 1 Sample chamber**
Large sample chamber to accept a variety of sample holders and accessories
- 2 Xenon lamp**
150 W xenon lamp with power saving auto on/off
- 3 Excitation monochromator**
Fast scanning and high resolution
- 4 Emission monochromator**
Fast scanning and high resolution
- 5 PMT detector**
Wide detection range from 200 to 900 nm
- 6 Accessory port**
Allows an external accessory or laser source to be used with the standard sample chamber




RAPID AND RELIABLE OPTICAL SYSTEM

EXCELLENT SIGNAL-TO-NOISE RATIO

WATER RAMAN 750:1 (RMS-PK) / 15,000:1 (RMS-BG)

The FE30 achieves high sensitivity by combining an efficient optical and electronic system with a high energy light source, and best-in-class photomultiplier tube (PMT) detector. This high sensitivity allows for fluorescence detection at small bandwidths and ensures accurate measurements, even for samples of very low concentrations.

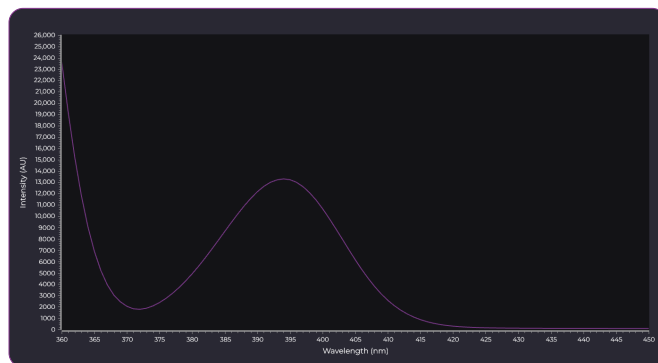

Water Raman Spectrum

EXTENDED WAVELENGTH RANGE (UP TO 900 NM)

A high performance PMT detector with wavelength range up to 900 nm is the standard configuration of FE30.

HIGH INTENSITY XENON LAMP


The high energy output 150 W xenon lamp ensures a sufficient and stable light source, which is critical to high sensitivity and accurate measurement.

RAPID ACQUISITION RATE (60,000 NM/MIN)

FE30 features rapid scanning rate up to 60,000 nm/min, allowing the fast measurement and construction of 3D spectra in a few minutes.

ADJUSTABLE BANDWIDTH

Spectral bandwidths can be adjusted easily using the Spectracle® software, allowing improvements in resolution and spectral analysis.

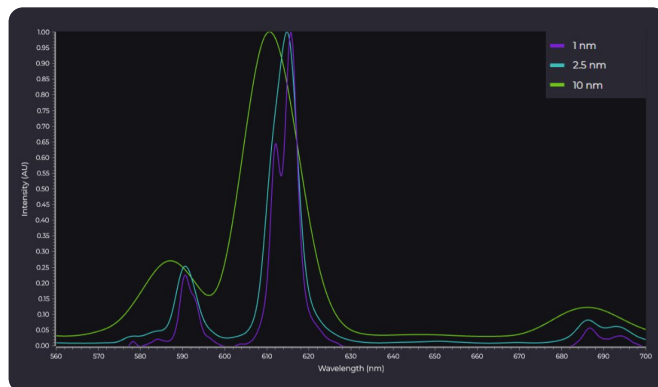

Europium is a rare earth with a sharp luminescent peak under excitation. The narrow emission lines of Europium can be resolved at low emission bandwidths

SAMPLE ACCESSORIES


Name	Description
Standard Cell Holder	Standard cell holder for a 10 mm fluorescence cuvette, included with every FE30 unit
Thermostatic Cell Holder	Cell holder with temperature control from room temperature up to +80°C
Polariser Holder	For studying samples with fluorescence anisotropy
Trace Solid Sample Holder Adjustable Angle	Fits to the standard cell holder. Angle can be adjusted 0-90° horizontally
Solid Sample Holder Adjustable Angle	For powder and thin film samples. Angle adjustable 0-90° horizontally
Port Extension	For coupling with external laser source for excitation

SPECTRACLE® SOFTWARE

Check Signal is a new feature that allows the user to check and monitor the signal level and then adjust the related parameters such as Ex/Em bandwidth and PMT voltage to obtain the optimal signal intensity.

WORKSPACE

With its intuitive workspace design, Spectracle® makes it easy to create and customise method flows that streamline data acquisition. Users can work more efficiently and focus on obtaining high-quality results rather than manual setup.

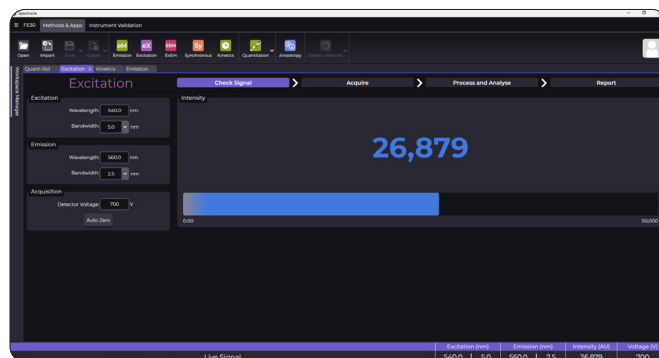


Check Signal feature



1 Method Setup

2 Acquisition

3 Data Processing

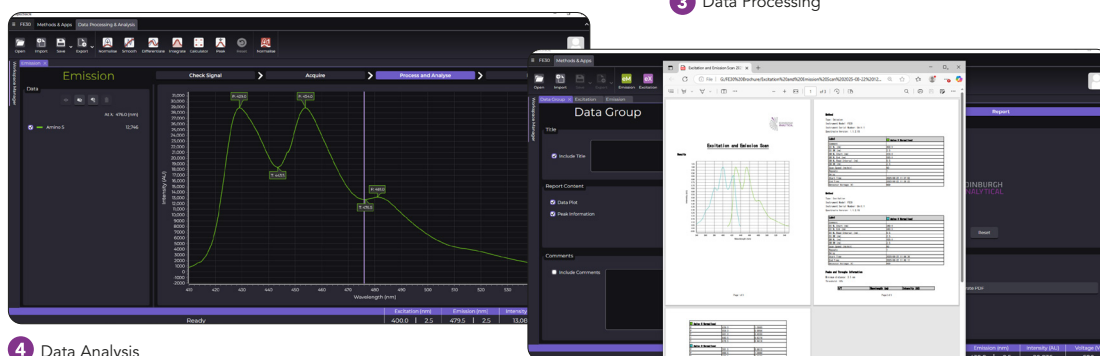

4 Data Analysis


5 Reporting




SOFTWARE MEASUREMENTS

MEASUREMENT MODES


- + Wavelength scan:**
Measure Excitation, Emission or Synchronous wavelength scans of different samples. The spectra can be analysed using the built-in spectrum calculator, or manipulated in Workspace environment
- + Time scan:**
Perform kinetic measurement such as enzyme activity or other reactions
- + 3D Scan:**
3D scan can be used for quick overview of the fluorescence characteristics of the sample. It can also be used for fingerprint analysis or advanced modelling techniques
- + Quantitation:**
Generate calibration curves, including second order

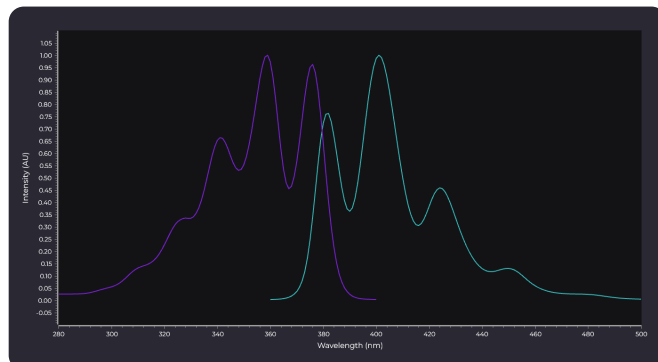

Excitation and emission spectra of anthracene

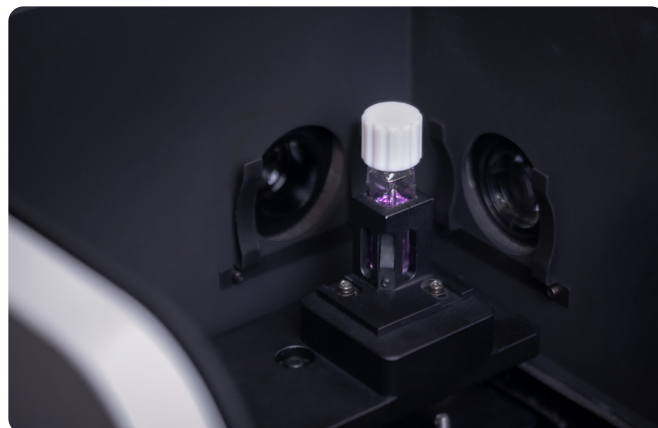

Calibration curve of fluorescein

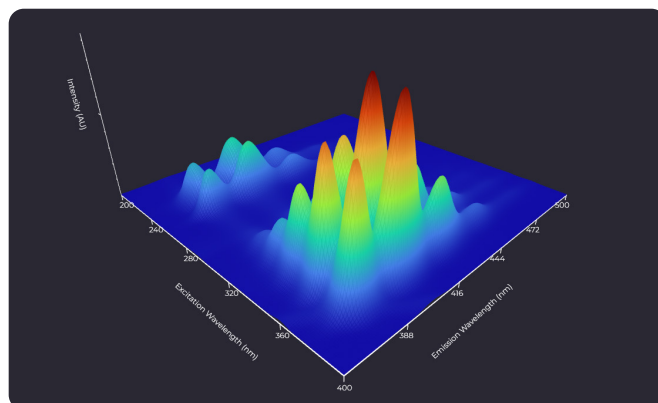

Excitation emission map of anthracene

SOFTWARE CONTROL

SPECTRACLE® PC-CONTROLLED SOFTWARE


Spectracle® offers all control, validation, data analysis and reporting functionalities for FE30 in one PC-operated software package. Collected data is stored in individual data files or grouped data, where it can then be organised and analysed, as well as exported in .TXT, .CSV or PDF format.

VALIDATION FUNCTIONS & AUTOMATION

- > Raman Water scan for Signal-to-Noise ratio
- > Excitation and Emission wavelength accuracy




Wavelength Accuracy Validation

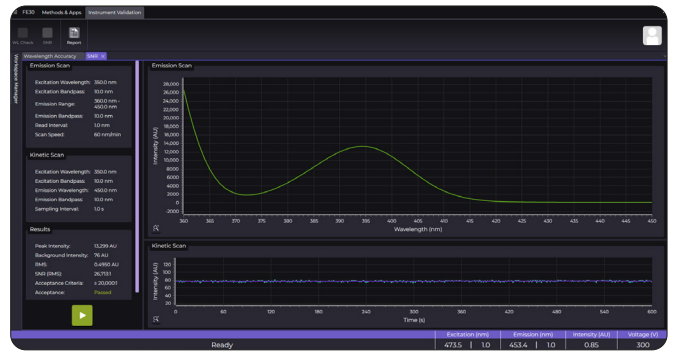


Signal-to-Noise Ratio Validation

DATA HANDLING

- > Rescaling, data readout, spectrum overlay, peak & trough analysis, arithmetic, smoothing, differentiation, area & rate calculating
- > Report generation and file output in CSV or PDF format

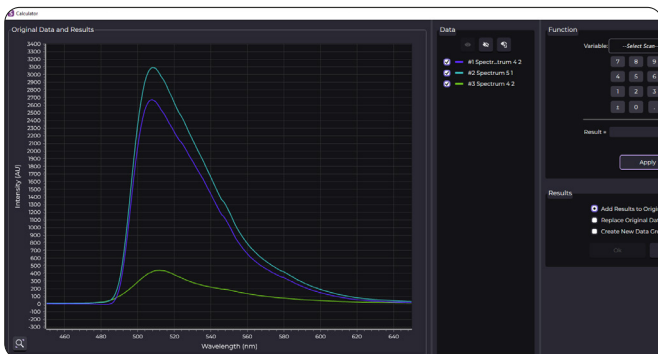

Spectrum calculation

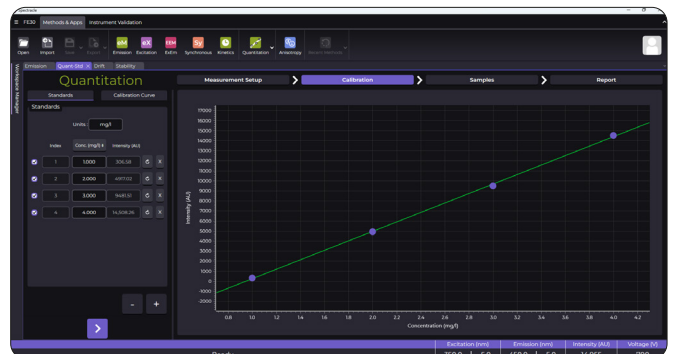

Linearity plot



SPECIFICATIONS

FE30 Fluorescence Spectrometer

Working Environment and Requirements

Working Temp 10 – 35°C ambient temperature

Power Supply 100 – 240 V, 50-60 Hz

Main Specifications

Excitation Source High intensity 150 W continuous xenon lamp

Wavelength Range Excitation: 200 – 900 nm
Emission: 200 – 900 nm

Spectral Bandwidth Excitation: 1, 2.5, 5, 10, 20 nm
Emission: 1, 2.5, 5, 10, 20 nm

Wavelength Accuracy ± 2.0 nm

Wavelength Repeatability ± 1.0 nm

Sensitivity RMS-PK = 750:1, RMS-BG = 15,000:1*

Wavelength Scan Speed Max 60,000 nm/min; Selectable from 30, 60, 240, 1200, 2400, 12,000, 30,000, 60,000 nm/min

Scan Interval 0.1 – 10.0 nm

Detector Voltage Continuously adjustable negative high voltage 200 – 1,000 V

Fluorescence Intensity Drift <1.5% Ex: 350 nm, Em: 450 nm (within 10 min)

Fluorescence Value Range 0 to 50,000

Detector Photomultiplier tube R928

Software Spectracle® PC-controlled software

Sample Chamber Dimension 247 (W) × 215 (D) × 172 (H) mm

Instrument Dimension 660 (W) × 600 (D) × 250 (H) mm

Weight 55 kg

Software Functions

Wavelength Scan Excitation, Emission, Synchronous

Kinetics Fixed wavelength time scan

Quantitation Quantitative analysis, calibration curve (1st and 2nd order), sample blank measurement, sample measurement, standard curve coefficient input

ExEm Map 2D, 3D, heatmap view

Spectral Processing Normalise, smooth, differentiate, integrate, calculate, peak analysis

Validation Function S/N ratio measurement, wavelength check

Report Output Wavelength scan and quantitative analysis PDF report output, export to Excel™

Scope of Delivery

Box Includes
1 x FE30 Unit
1 x Installation and Quick Guide
1 x Quartz Cuvette
1 x Diffuser
1 x USB Cable

After Sales Service

Warranty Guaranteed (under normal maintenance) for one year from the date of delivery

*Standard water Raman measurement conditions: excitation wavelength = 350 nm, excitation and emission bandwidth = 10 nm, emission range = 360 – 450 nm, read interval = 1 nm, scan speed = 60 nm/min. Calculation based on the root mean square (RMS) method.



EDINBURGH
ANALYTICAL



SCAN ME

EXCELLENCE IN SPECTROSCOPY PRECISION IN EVERY MEASUREMENT


EDINBURGH ANALYTICAL

Edinburgh Analytical provides cutting-edge solutions and support for general and analytical laboratories while maintaining the core values and culture of excellence that define Edinburgh Instruments.

EDINBURGH INSTRUMENTS

Edinburgh Instruments has been providing high performance molecular spectroscopy instrumentation for over 50 years.

Our photoluminescence, Raman, and transient absorption spectrometers set the standard in advanced optical spectrometers for research and industry.

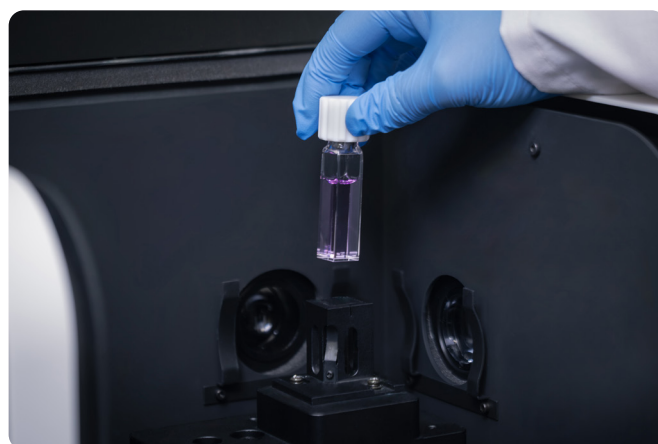

EDINBURGH ANALYTICAL

2 Bain Square, Livingston, EH54 7DQ, United Kingdom

Tel: +44 (0)1506 425 300

Fax: +44 (0)1506 425 320

sales@edinst.com

Registered in England and Wales No: 962331 VAT No:GB 271 7379 37
©Edinburgh Instruments Ltd 2026

STG08 / 01.2026



Customer support is available worldwide

www.edinburghanalytical.com

